

Network Video Recorder

NVR302-S2-P Series



Key Features


- Support Ultra265/H.265/H.264 video formats
- 8/16-channel input
- Plug & Play with 8/16 independent PoE network interfaces
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

| Model | NVR302-08S2-P8 | NVR302-16S2-P16 |
|-----------------------------|--|--|
| Video/Audio Input | | |
| IP Video Input | 8-ch | 16-ch |
| Two-way Audio Input | 1-ch, RCA | |
| Network | | |
| Incoming Bandwidth | 80Mbps | 160Mbps |
| Outgoing Bandwidth | 64Mbps | |
| Remote Users | 128 | |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP | |
| Browser | IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome(version 45 and above) for Windows Edge(version 79 and above) for Windows | |
| Video/Audio Output | | |
| HDMI/VGA Output | HDMI: 4K (3840x2160@30), 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60, 1024X768@60 VGA: 1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60 | |
| Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | |
| Audio Output | 1-ch, RCA | |
| Audio Compression | G.711A, G.711U | |
| Synchronous Playback | 8-ch | 16-ch |
| Liveview display | 1/4/6/8/9 | 1/4/6/8/9/16 |
| Corridor Mode Screen | 3/4/5/7/9 | 3/4/5/7/9/10/12/16 |
| Snapshot | | |
| FTP/Schedule/Event Snapshot | 4-ch snapshot, up to D1 resolution | |
| Decoding | | |
| Decoding format | Ultra 265/H.265/H.264 | |
| Live view/Playback | 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | |
| Capability | 2 x 4K@30, 4x 4MP@30, 5 x 3MP@30, 8 x 1080P@30 | 2 x 4K@30, 4x 4MP@30, 5 x 3MP@30, 8 x 1080P@30, 16 x 720P@30 |
| Hard Disk | | |
| SATA | 2 SATA interfaces | |
| Capacity | Up to 10TB for each disk (The maximum HDD capacity varies with environment temperature) | |
| Smart | | |
| VCA Detection by Camera | Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Ultra Motion Detection(UMD) | |
| VCA Search | Behavior Search | |
| People counting | People Flow Counting, Crowd Density Monitoring | |


| | | |
|---|---|--|
| Smart Intrusion Prevention (SIP), UMD by Camera | Total 8-ch | |
| General Alarm | | |
| General Alarm | Motion, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection | |
| Alert Alarm | IP Conflict, Network Disconnected, Disk Offline , Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal | |
| External Interface | | |
| Network Interface | 1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface | |
| USB Interface | Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0 | |
| Alarm In | 4-ch | |
| Alarm Out | 1-ch | |
| RS232 | NA | |
| RS485 | NA | |
| PoE | | |
| Interface | 8 RJ-45 10M/100M self-adaptive Ethernet Interface | 16 RJ-45 10M/100M self-adaptive Ethernet Interface |
| Max Power | Max 30W for single port Max 130W in total | Max 30W for single port Max 240W in total |
| Supported Standard | IEEE 802.3af/at | |
| General | | |
| Power Supply | 100 ~ 240 V AC Power Consumption: ≤10W(without HDD) | |
| Working Environment | -10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing) | |
| Dimensions (W×D×H) | 380mm ×315mm × 53mm (14.9" × 12.4" ×2.1") | |
| Weight (without HDD) | ≤2.6kg (5.73lb) | |
| Certification | | |
| Certification | CE, FCC, UL, RoHS, WEEE | |
| CE | EN 55032: 2015, EN 61000-3-3: 2013, EN IEC 61000-3-2: 2019, EN 55035: 2017 | |
| FCC | Part15 Subpart B, ANSI C63.4 | |

Dimensions

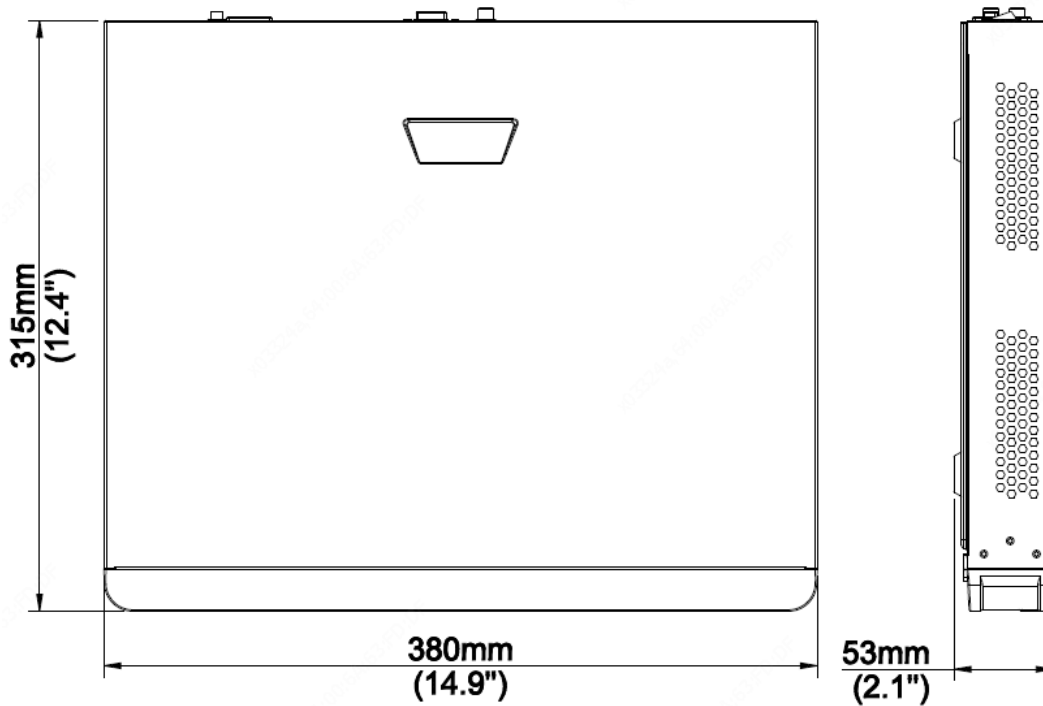

Rear Panel

Take **NVR302-08S2-P8** for example

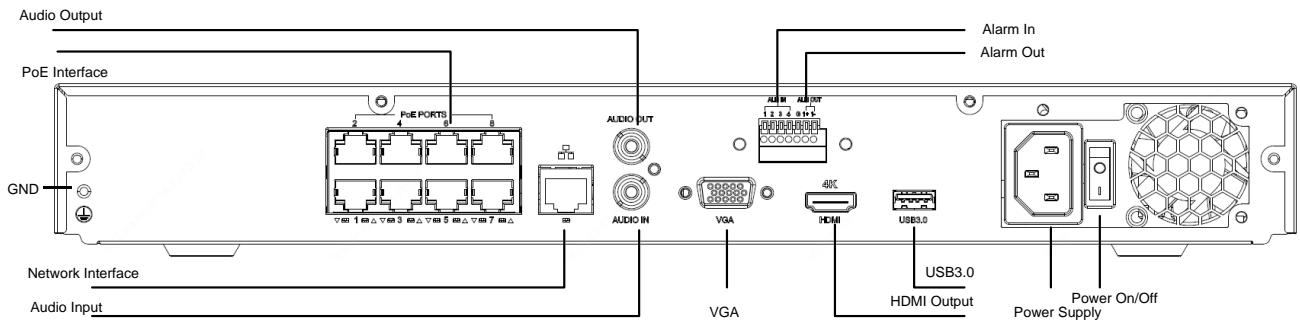

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2020-2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.