

22" LED FHD Monitor

MT-22-L




Key Features

- True color display
- Resolution is up to at 1920×1080
- Wide view of field:178°(H)/ 178°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

Specifications

Model	MT-22-L
Display	
Display Type:	LED Backlight
Screen Size	21.5 Inch
Pixel Pitch(mm)	0.265(H)× 0.24825(V)
Max Resolution	1920×1080
Brightness (cd/m ²)	250
Contrast	4000:1
Response Time(ms)	6.5
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Refresh Rate	60Hz
Interface	
VGA	1
HDMI	1
OSD	
Multi-Language	8 (English, France, Spanish, German, Russia, Korea, Japanese, Simplified Chinese)
Mounting	
VESA	100mm x 100mm
General	
Power Supply	DC 12V, 2A
Consumption	<23 W(on) <0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C/32°F ~ 104°F
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~ 50°C/14°F ~ 122°F
Storage Humidity	0%~90% (No Condensation)
Dimension (W×H×D)	508.02mm × 393.87mm × 210.00mm(With Pedestal)
Package(W×H×D)	570mm × 395mm × 118mm
Weight	Net Weight:2.51Kg Gross Weight:3.3Kg
Accessory	
Standard	HDMI Cable, Adapter, Pedestal, Quick Guide
Optional	Hanging Bracket(Model: HB-4022-A)

Dimensions

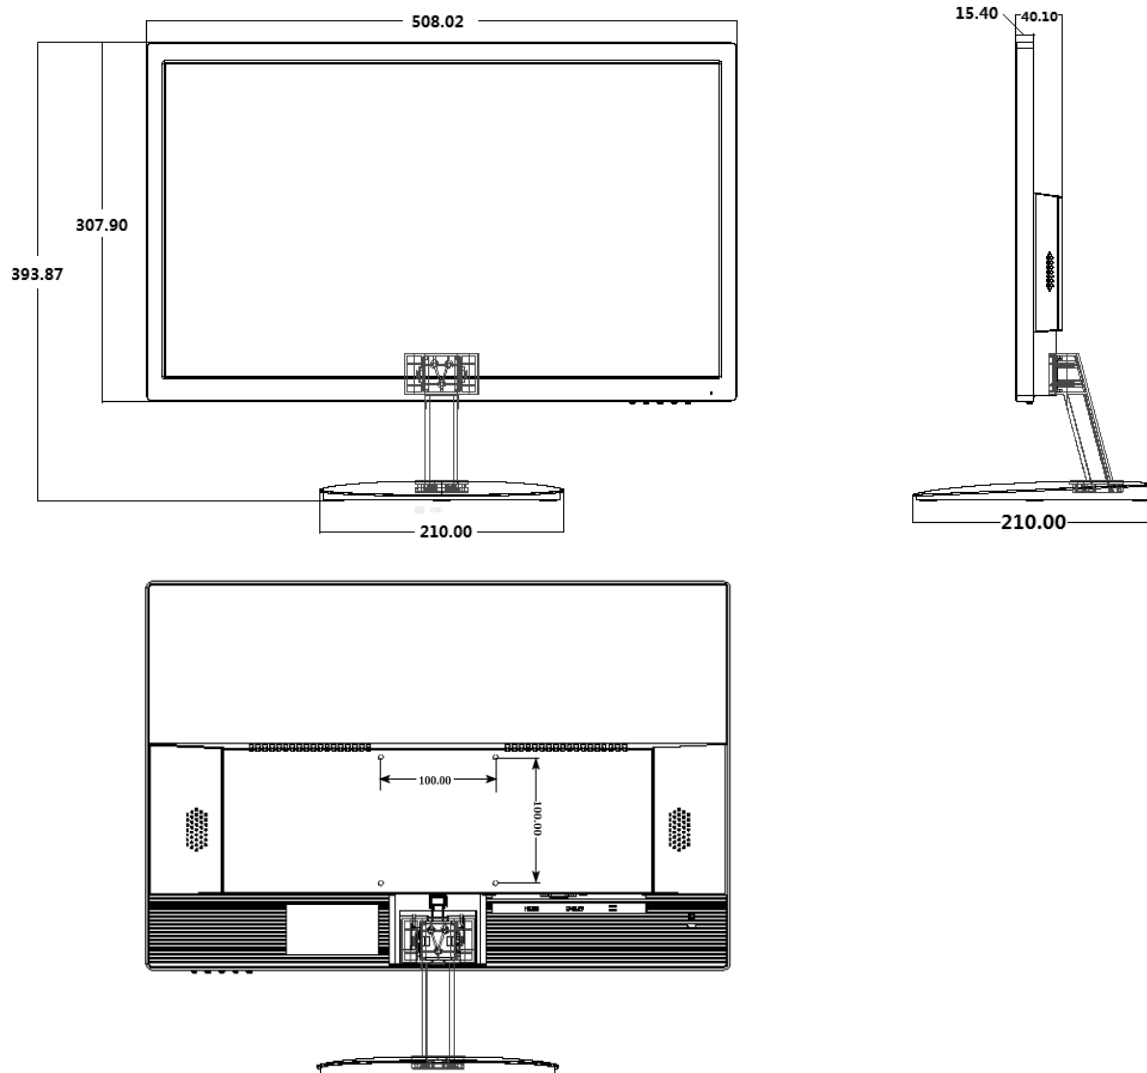

Interfaces

